

ViewSonic VIEWBOARDS ViewBoard IFP6552-2F

Key Features


- Seamless plug-and-play connectivity with triple USB-C ports
- Intuitive Android™ 13 customizable launcher with draggable apps and widgets
- Advanced security controls and compliance standards that safeguard your data
- Enhanced collaboration with integrated myViewBoard software powered by Octa-core CPU



*Google, Android, YouTube, Google Maps and other marks are trademarks of Google LLC.

Product Omschrijving

Tap into limitless learning with the ViewBoard IFP52-2F Series. Certified under the Android Enterprise Device License Agreement (EDLA), it seamlessly harmonizes the Android™ 13 operating system with myViewBoard software and Google Play Store access to deliver enriched learning experiences enhanced by robust security features. Collaborate with split-screen multitasking; enjoy seamless connectivity and streamlined workflows empowered by triple USB-C ports and vCast wireless screen casting; and captivate remote and in-person students alike using its built-in microphones and front-facing speaker. Complete with a full range of compatible accessories, it invigorates learning experiences to take student engagement to new heights.

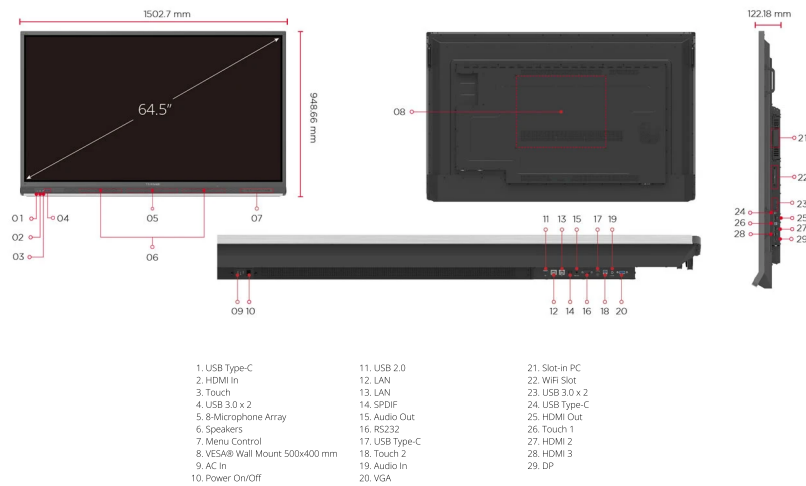

Bezoek Gebruikers

www.viewsonic.com



DISPLAY

| | |
|------------------------------------|--|
| Paneelgrootte: | 65" |
| Paneeltype: | TFT LCD Module with DLED Backlight, IPS |
| Weergavegebied (mm): | 1428.48(H) x 803.52 (V) (64.5" diagonal) |
| Aspectratio: | 16:9 |
| Resolutie: | UHD 3840x2160(Pixels) |
| Colors: | 1.07B colors |
| Helderheid: | 450 nits |
| Contrastverhouding: | 5000:1(Typ.) 12000:1(with DCR enabled) |
| Reactietijd: | from ≤7ms to ≤6ms |
| Kijkhoeken: | H = 178, V = 178 typ. |
| Levensduur achtergrondverlichting: | 50,000 hrs (typ). |
| Oppervlakte behandeling: | Hardness: 7H. Anti-glare coating |
| Oriëntatie: | Landscape |

PLATFORM

| | |
|------------|-------------------------------|
| Processor: | Octa-Core CPU (A73*4 + A53*4) |
| RAM: | 8GB |
| Opslag: | 64GB |

TOUCH

| | |
|------------------|--|
| Type: | UFT (Ultra Fine Touch) Technology |
| Touch resolutie: | 32767 x 32767 |
| Touch punt: | Windows: 40 points touch, Android: 20 points touch |

INPUT

| | |
|--------------|--|
| HDMI: | x3 (Frontx1:HDMI2.0 with CEC ; Rearx2:HDMI2.1 with CEC/ARC & HDMI 2.0 with CEC) |
| RGB/VGA: | x1 |
| DisplayPort: | x1 |
| Audio: | x1 (PC audio in) |
| RS232: | x1 |
| OPS: | module slot x 1 |

OUTPUT

| | |
|--------|-------------------|
| HDMI: | x1 |
| Audio: | x1 (Earphone out) |
| SPDIF: | x1 |

LAN

| | |
|-------|----|
| RJ45: | x2 |
|-------|----|

USB

| | |
|---------|--|
| Type A: | USB3.0 x 4 (Front x 2; Rear x 2) USB 2.0x1 (Rear) |
| Type B: | USB 3.0 x3(Front x1; Rear x 2) |
| Type C: | x3 (Front x1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rear x1 with USB3.0, DP1.2, Ethernet 100M, PD 100W; Rear x1 with USB3.0 data only) |

SPEAKERS

| |
|----------|
| 20x2+20w |
|----------|

MICROPHONE

| |
|-----------------------------|
| built-in 8-array microphone |
|-----------------------------|

TOP CAMERA PLATE

| |
|-----|
| Yes |
|-----|

INGESLOTEN BESTURINGSSYSTEEM

| |
|------------|
| Android 13 |
|------------|

BUNDELSOFTWARE

| | |
|--------------------------|--|
| Basis annotatiesoftware: | myViewBoard WhiteBoard for Android |
| Pro annotatiesoftware: | myViewBoard WhiteBoard for Windows (embedded in VPC) |
| Wireless Presentation: | myViewBoard Display, vCast |

SPECIALE EIGENSCHAPPEN

| | |
|---|--|
| All-in-one USB port: | USB 3.0 "SmartPort USB" to all channels. |
| Eenvoudig delen via LAN tussen IFP en slot-in-apparaat: | 10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000) |
| Light Sensor: | Yes |

STROOM

| | |
|-------------|-----------------------------------|
| Spanning: | 100-240VAC +/- 10% Wide Range |
| Consumptie: | 91.41W (Energy Star) / Off: <0.5W |

ERGONOMICS

| | |
|----------------------|-----------|
| Wandmontage (VESA®): | 500 x 400 |
|----------------------|-----------|

OPERATING CONDITIONS

| | |
|--------------------|-----------------------------|
| Temperatuur (° C): | 0°C to 40°C |
| Luchtvochtigheid: | 20% ~ 80% RH non-condensing |

AFMETINGEN (B X H X D)

| | |
|-------------------------|--|
| Fysiek (inch/mm): | 1502.7 x 948.66 x 122.18 mm / 59.161 x 37.349 x 4.81 in |
| Verpakking (inch / mm): | 1618 x 1060 x 225 mm / 63.7 x 41.7 x 8.9 in |

WEIGHT

| | |
|------------------|---------------|
| Netto (lb / kg): | 130.1 lb/59kg |
| Bruto (lb/kg): | 149.9lb/68kg |

REGULATIONS

NRTL w/ CA,FCC-B w, DOE Energy Star,DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE

VERPAKKINGSINHOUD

- 3m power cord by ship area
- Remote control with AAA battery
(new VS remote control)
- 3m touch USB cable
- Touch pen x 2 (a set)
- Quick Start Guide + Compliance statement
- RS232 adapter
- Clamp x 5
- Camera Plate
- Screw x 8 (camera 2+2, wall mount 4)
- HDMI cable 3m
- AAA Battery x 2
- Compliance statement

COMPATIBLE SLOT-IN PC

| |
|----------------------------|
| VPC35-W53-G1, VPC37-W53-G1 |
|----------------------------|

