

ViewSonic® LED DISPLAY

VA2408-MHDB

Toets Features


- 99% sRGB SuperClear® IPS panel
- 1ms (MPRT) response time for precision
- 100Hz Variable Refresh Rate eliminates screen tearing and reduces stuttering
- HDMI, VGA, DisplayPort, and USB downstream/upstream inputs for flexible connectivity
- Eye ProTech+ for always-on eye protection



Product Omschrijving

The ViewSonic VA2408-MHDB is a 24" Full HD monitor featuring HDMI, VGA, DisplayPort, and USB downstream/upstream inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering are delivered through built-in low blue light screen eye-care technology, and various ViewMode presets. Simply expand your workspace and experience truly seamless, ergonomic multitasking on just one screen with a VESA-compatible mount at low power consumption.



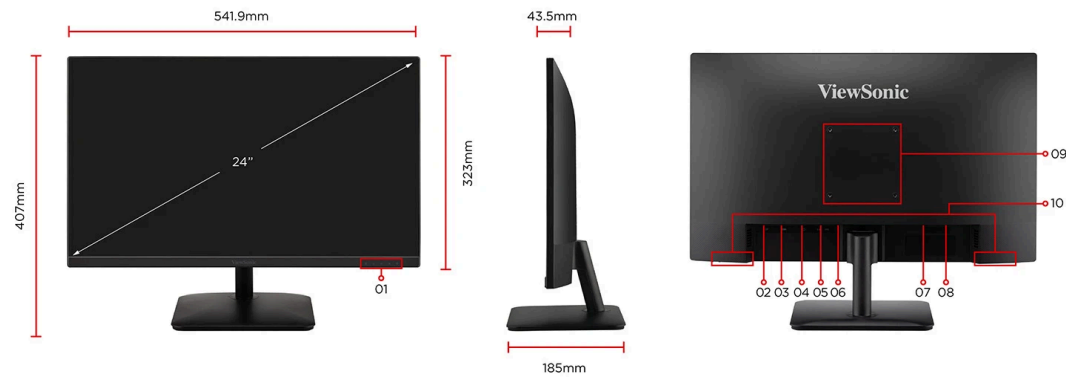

1. Menu Control Panel
2. Display Port
3. HDMI
4. VGA
5. Audio Out
6. Power In
7. USB Type B Upstream

8. USB Type A Downstream*2
9. VESA Compatible (Wall Mount 100x 100 mm)
10. Speakers

Bezoek Gebruikers

www.viewsonic.com



DISPLAY

Schermgrootte (inch):	24
Zichtbare oppervlakte (in.):	23.8
Paneeltype:	IPS Technology
Resolutie:	1920 x 1080
Resolutietype:	FHD (Full HD)
Statische contrastverhouding:	1,300:1 (typ)
Dynamische contrastverhouding:	50M:1
Lichtbron:	LED
Helderheid:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspectratio:	16:9
Reactietijd (MPRT):	1ms
Kijkhoeken:	178° horizontal, 178° vertical
Levensduur achtergrondverlichting (uren):	30000 Hrs (Min)
Kromming:	Flat
Vernieuwingsfrequentie (Hz):	100
Technologie met variabele vernieuwingsfrequentie:	Yes
Blauwlichtfilter:	No (Hardware Solution)
Flikkervrij:	Yes
Color Gamut:	NTSC: 77% size (Typ) sRGB: 108% size / 99% coverage (Typ)
Pixelgrootte:	0.275 mm (H) x 0.275 mm (V)
Oppervlakte behandeling:	Anti-Glare, Hard Coating (3H)
COMPATIBILITEIT	
PC-resolutie (max.):	1920x1080
Mac® Resolutie (max.):	1920x1080
PC-besturingssysteem:	Windows 10/11 certified; macOS tested
Mac® Resolutie (min):	1920x1080
CONNECTOR	
VGA:	1

BESTURING

Fysieke controles:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
Schermweergave:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

BEDRIJFSOMSTANDIGHEDEN:

Temperatuur:	32°F to 104°F (0°C to 40°C)
Vochtigheid (niet-condenserend):	20% to 90%

MUURBEVESTIGING

VESA-compatibel:	100 x 100 mm
------------------	--------------

INGANGSSIGNAAL

Frequentie Horizontaal:	RGB Analog: 24 ~ 86KHz, HDMI (v1.4): 30 ~ 115KHz, DisplayPort (v1.2): 30 ~ 115KHz
Frequentie verticaal:	RGB Analog: 48 ~ 75Hz, HDMI (v1.4): 48 ~ 100Hz, DisplayPort (v1.2): 48 ~ 100Hz

VIDEO-INGANG

Digitale synchronisatie:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2)
Analog Sync:	Separate - RGB Analog

ERGONOMIE

Kantelen (vooruit/achteruit):	-5° / 20°
-------------------------------	-----------

GEWICHT (IMPERIAAL)

Netto (lbs):	7.3
Netto Zonder Standaard (lbs):	6.4
Bruto (lbs):	9.7

GEWICHT (METRISCH)

Netto (kg):	3.3
Netto Zonder Standaard (kg):	2.9
Bruto (kg):	4.4

AFMETINGEN (IMPERIAAL) (BXHXD)

Verpakking (inch):	23.8 x 15.7 x 4.7
Fysiek (inch/mm):	21.3 x 16 x 7.3
Fysiek zonder standaard (in.):	21.3 x 12.7 x 1.7

AFMETINGEN (METRISCH) (BXHXD)

Verpakking (mm):	605 x 400 x 120
------------------	-----------------



USB 3.2 Type A Down Stream:	2	Fysiek (mm):	542 x 407 x 185
USB 3.2 Type B Up Stream:	1	Fysiek zonder standaard (mm):	542 x 323 x 44
3.5mm Audio Out:	1	ALGEMEEN	
HDMI 1.4:	1	Regelgeving:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA
DisplayPort:	1		
Power in:	DC Socket (Center Positive)		
AUDIO		VERPAKKINGSINHOUD:	VA2408-MHDB x1, HDMI Cable (v1.4; Male-Male) x1, USB A/B Cable (v3.2; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x1 or 2 (by country)
Interne luidsprekers:	2Watts x2	Recyclen/verwijderen:	Please dispose of in accordance with local, state or federal laws.
STROOM		Garantie:	*Warranty offered may differ from market to market
Eco-modus (behouden):	12W		
Eco Mode (optimized):	14W		
Verbruik (typisch):	16W		
Verbruik (maximaal):	18W		
Spanning:	AC 100-240V		
Stand-by:	0.3W		
Stroomvoorziening:	External Power Adaptor		
EXTRA HARDWARE			
Kensington-slotsleuf:	1		

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

